

High Capacity Stainless Steel Bending Ring Compression **LOAD CELL**

CTUS
Series



- Capacities 5,000 to 50,000kg
- Sealed to IP68
- Robust Stainless Steel Construction
- Low Profile/High Accuracy
- Sense wire facility
- OIML R60 approved
- Optional ATEX Version
- 3 YEAR WARRANTY

Options Available

Other Ranges Available on request

Different Cable Lengths

Full range of mounting options available, including

- Vessel/Silo Mounting Assembly
- Weighbridge Mounting Assembly
- Load Buttons
- Special Mounting Assemblies (on request)

ATEX Certification: II I GD Ex ia IIC T6
(Intrinsically Safe)

DESCRIPTION

The CTUS is a low profile bending ring/ring torsion load cell designed for high capacity weighing systems such as silos and weighbridges. It is also ideally suited for force measurement applications where high accuracy is required and the force to be measured is high and in a confined space, such as in press calibration.

The low profile of the CTUS and it's low cost compared to competitive load cells of similar capacities has made it the first choice for many Process Engineers.

The load cell can be supplied with various mounting options, and can be combined with any of our Instrumentation range to complete any system requirements.

Sense wires fitted to the CTUS to offer even greater accuracy when used with electronics with sensing supplies, by compensating for changes in lead resistance due to temperature change and/or cable extension.

Transducer Specialists...

APPLIED MEASUREMENTS LIMITED


3 MERCURY HOUSE - CALLEVA PARK - ALDERMASTON - BERKSHIRE - RG7 8PN - UK

Tel: (+44) 0118 981 7339 Fax: (+44) 0118 981 9121 email: info@appmeas.co.uk Internet: www.appmeas.co.uk



SPECIFICATION

Wiring Schematic Diagram

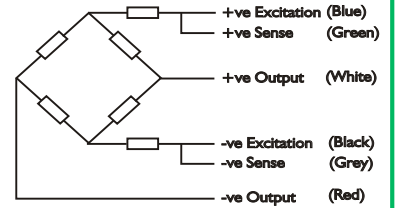

CHARACTERISTICS	CTUS	UNITS
Rated Capacities:	5,000, 10,000, 20,000, 30,000, 50,000	kg
Rated Output:	2.0 ± 0.1%	mV/V
Total Error:	<0.02 (<0.05 on 50,000kg)	±% of Rated Output
Zero Return after 30 mins:	<0.017	±% of Applied Load
Zero Balance:	<2.0	±% of Rated Output
Temperature Range: Operating	-30 to +70	°C
Compensated	-10 to +40	°C
Temperature Effect: On Output	<0.001	% of Applied Load/ °C
On Zero	<0.001	% of Applied Load/ °C
Safe Overload:	150	% of Rated Capacity
Ultimate Overload:	300	% of Rated Capacity
Excitation: Recommended	10	Volts AC or DC
Maximum	15	Volts AC or DC
Input Impedance:	1065 ± 50	Ohms
Output Impedance:	1000 nominal	Ohms
Insulation Impedance:	>2000	Megaohms
Deflection at Rated Capacity:	<0.5	mm
Weight: (including cable)	1.1 (5T), 1.5 (10T), 3.25 (20 & 30T), 4.3 (50T)	kg
Construction:	Stainless Steel	
Environmental Protection:	IP68	
Cable:	6 Wire Polyurethane, Double Screened 5000kg 5 metres long 10,000kg 10 metres long 20, 30 & 50,000kg 20 metres long	

All dimensions in mm

